# **ESA/EDA-Series Flooring System**

## **FEATURES**


**COORDINATE WITH FLOORING** Seamless integration with existing VCT, carpet and tile flooring.

**ADA COMPLAINT** This system is not a trip hazard as the nobump design provides a finished flush floor transition.


## **DETAILS**

MATERIAL 6063-T6 Aluminum, Meets ASTM B221 FINISH Mill MOVEMENT


• Thermal: Horizontal
MOUNTING Surface
JOINT SIZE Up to 2 inches
LENGTH 10 Linear Feet
LOAD Pedestrian and Light Cart
INSTALLATION Floor
OPTIONS Moisture barrier, fire barrier
and additional materials, sizes and
finishes upon request

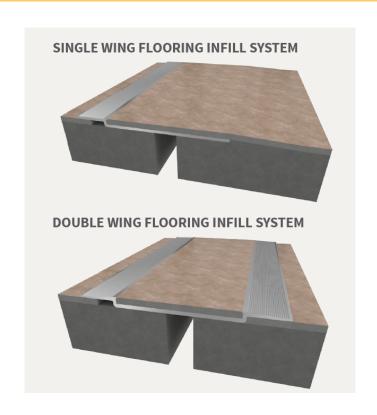

## SINGLE WING FLOORING INFILL SYSTEM

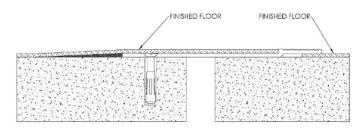

## **DOUBLE WING FLOORING INFILL SYSTEM**

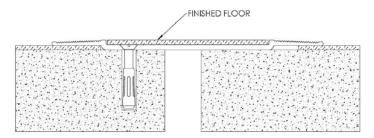

## **MODELS**

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	INFILL HEIGHT	TOTAL MOVEMENT
ESA150-125	Floor to Floor	2" (51mm)	1.5" (38mm)	0.125" (3mm)	1.25" (32mm)
ESA150-250	Floor to Floor	2" (51mm)	1.5" (38mm)	0.25" (6mm)	1.25" (32mm)
ESA150-375	Floor to Floor	2" (51mm)	1.5" (38mm)	0.375" (10mm)	1.25" (32mm)
EDA150-125	Floor to Floor	2" (51mm)	3" (76mm)	0.125" (3mm)	1.25" (32mm)
EDA150-250	Floor to Floor	2" (51mm)	3" (76mm)	0.25" (6mm)	1.25" (32mm)
EDA150-375	Floor to Floor	2" (51mm)	3" (76mm)	0.375" (10mm)	1.25" (32mm)



Erie Metal Specialties, Inc.
13311 Main Road
Akron, NY 14001
Phone: 716-542-3991
Website: www.eriemetal.com
E-Mail: sales@eriemetal.com