

CSPR-Series Foam Seal (Pick Resistant)

Interior Joints (Wall)


The Compression Seal Pick Resistant (CSPR) is a premium quality joint sealant composed of an open micro-cell polyurethane foam impregnated with a hydrophobic polymer sealing compound and a factory applied high durometer polyurethane surface.

The seal was developed to perform in areas where a standard silicone faced sealant is vulnerable to vandalism. When properly installed, the seal provides a watertight, dustproof, airtight, UV stable, chemically resistant, soundproof and insulated primary sealant.

FEATURES

EASY INSTALLATION Supplied in a pre-compressed state; not based on asphaltic or bitumastic impregnation; does not rely on the silicone coating or on the adhesion of a field applied bead of sealant to provide a watertight seal

EXCELLENT COMPRESSION RECOVERY Material expands to adapt to the width of the joint and irregularities of the substrate provided profile changes are not sudden or extreme

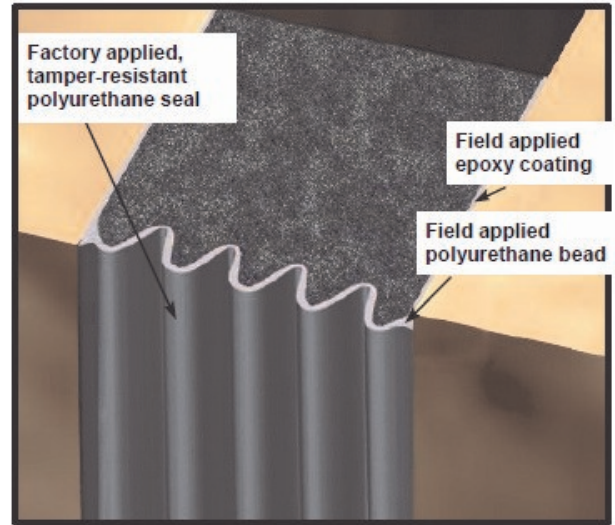

DETAILS

FINISH Available in Dow Corning® 790 and Pecora 890 Colors

MOVEMENT +/-50%

JOINT SIZE Up to 12 inches

LENGTH 5 LF sticks

MODEL	DEPTH OF SEAL	MIN. WIDTH	MID. RANGE	MAX. WIDTH	TOTAL MOVEMENT
CSPR-050	1.5" (38mm)	0.25" (6mm)	0.5" (13mm)	0.75" (19mm)	0.5" (13mm)
CSPR-100	1.5" (38mm)	0.5" (13mm)	1" (25mm)	1.5" (38mm)	1" (25mm)
CSSPR150	2" (51mm)	0.75" (19mm)	1.5" (38mm)	2.25" (57mm)	1.5" (38mm)
CSPR-200	2" (51mm)	1" (25mm)	2" (51mm)	3" (76mm)	2" (51mm)
CSPR-250	2" (51mm)	1.25" (32mm)	2.5" (64mm)	3.75" (95mm)	2.5" (64mm)
CSPR-300	3" (76mm)	1.5" (38mm)	3" (76mm)	4.5" (114mm)	3" (76mm)
CSPR-350	3" (76mm)	1.75" (45mm)	3.5" (89mm)	5.25" (133mm)	3.5" (89mm)
CSPR-400	3" (76mm)	2" (51mm)	4" (102mm)	6" (152mm)	4" (102mm)
CSPR-500	3" (76mm)	2.5" (64mm)	5" (127mm)	7.5" (191mm)	5" (127mm)
CSPR-600	4" (102mm)	3" (76mm)	6" (152mm)	9" (229mm)	6" (152mm)
CSPR-700	4" (102mm)	3.5" (89mm)	7" (178mm)	10.5" (267mm)	7" (178mm)
CSPR-800	4" (102mm)	4" (102mm)	8" (203mm)	12" (305mm)	8" (203mm)



Erie Metal Specialties, Inc.
13311 Main Road
Akron, NY 14001

Phone: 716-542-3991
Website: www.eriemetal.com
E-Mail: sales@eriemetal.com