


Factory Applied U.V. Resistant Pedestrian Grade Silicone

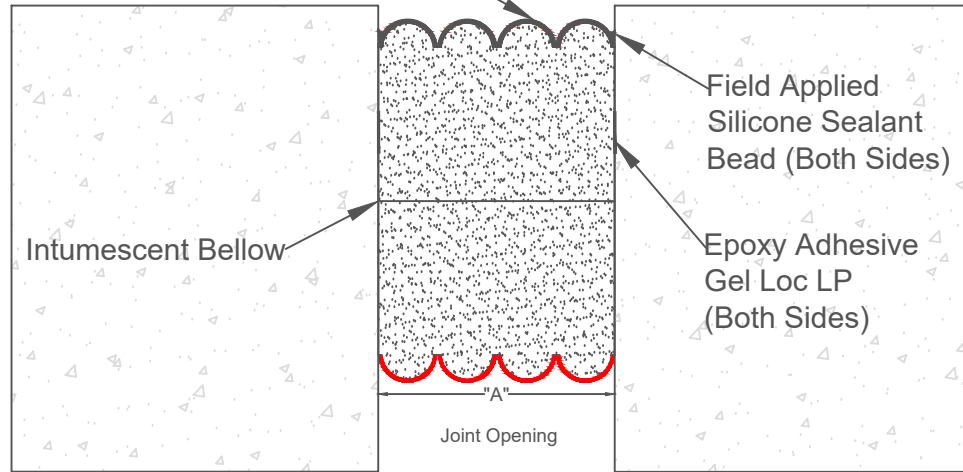

**CSH(2FRH-50)-SERIES**  
Horizontal Slab to Slab

\* Sizes 1" and greater available in 0.25" increments and up to 5". Available in +/- 25% movement upon request. Contact EMS for additional information.

PRODUCT	"A" Min. Width IN (MM)	"A" Mid Range IN (MM)	"A" Max. Width IN (MM)	Total Movement IN (MM)
CSH(2FRH-50)-050	0.25" (6.4)	0.50" (12.7)	0.75" (19.1)	0.50" (12.7)
CSH(2FRH-50)-100	0.50" (12.7)	1.00" (25.4)	1.50" (38.1)	1.00" (25.4)
CSH(2FRH-50)-150	0.75" (19.1)	1.50" (38.1)	2.25" (57.2)	1.50" (38.1)
CST(2FRH-50)-200	1.00" (25.4)	2.00" (50.8)	3.00" (76.2)	2.00" (50.8)
CSH(2FRH-50)-250	1.25" (31.8)	2.50" (63.5)	3.75" (95.3)	2.50" (63.5)
CSH(2FRH-50)-300	1.50" (38.1)	3.00" (76.2)	4.50" (114.3)	3.00" (76.2)

NO.	Description	Date	By
<small>The information contained herein is the proprietary property of ERIE METAL SPECIALTIES, INC. No portion of it may be reproduced by any means or used in any form except for the purpose for which it was intended. All rights of design and invention are hereby reserved.</small>			



13311 Main Road \* Akron \* New York \* 14001  
Phone: (716) 542-3991 \* Fax: (716) 542-3996 \* E-mail: sales@eriemetal.com

PROJECT: N/A

TITLE: CSH(2FRH-50)-Series Horizontal Slab to Slab

Detailed by:	Date:
BAF	07/20/16
Checked by:	Date:
SLP	07/22/16
Scale:	EMS Job #:
NTS	N/A
Sheet No.:	Drawing No.:
1 of 1	CSH(FR)-1