


# ENBF-Series No Bump System

The Seismic Glide No Bump system is designed to allow for multi-directional thermal movement, in a durable, easily assembled cover system. The convex design allows for a smooth, no bump, transition, when light cart wheeled traffic is rolled over the system.

## FEATURES

**ANTI-SLIP SURFACE** The no bump, ribbed anti-slip surface provides safe functionality for foot and cart traffic.

**COORDINATING CORNERS** Available with corner option for a complete floor solution.

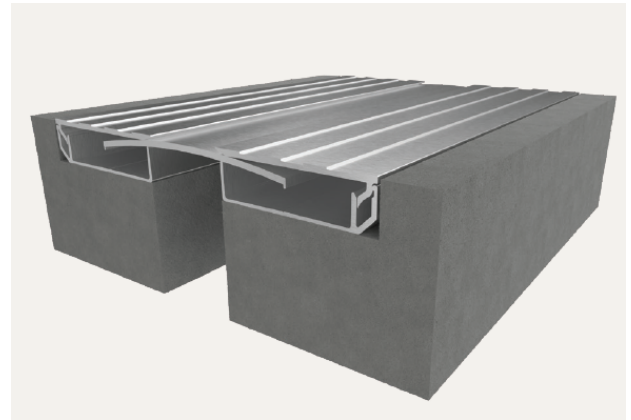

## DETAILS

**MATERIAL** 6063-T5 Aluminum

**FINISH** Mill

### MOVEMENT

- Thermal: Horizontal and Vertical
- Seismic: Lateral Shear

**MOUNTING** Block Out

**JOINT SIZE** 1 inch to 4 inches

**LENGTH** 10 Linear Feet

**LOAD** Pedestrian and Light Cart


**INSTALLATION** Floor

**OPTIONS** Moisture Barrier, Fire Barrier

### DECK-TO-FLOOR



### DECK-TO-WALL/CORNER

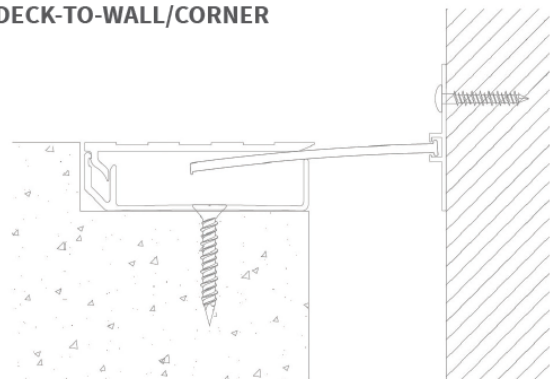

## MODELS

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
ENBF-100	Floor to Floor	1" (25mm)	5.5" (140mm)	1" (25mm)
ENBF-200	Floor to Floor	2" (51mm)	8.5" (216mm)	2" (51mm)
ENBF-300	Floor to Floor	3" (76mm)	9.5" (241mm)	3" (76mm)
ENBF-400	Floor to Floor	4" (102mm)	10.5" (267mm)	4" (102mm)
ENBF-100W	Floor to Wall	1" (25mm)	3.25" (83mm)	.5" (13mm)
ENBF-200W	Floor to Wall	2" (51mm)	5.31" (134mm)	1" (25mm)
ENBF-300W	Floor to Wall	3" (76mm)	6.25" (159mm)	1.5" (38mm)
ENBF-400W	Floor to Wall	4" (102mm)	7.25" (184mm)	2" (51mm)

