

BS25-Series

INSTALLATION INSTRUCTIONS

Material Application



For use in **horizontal and vertical joints**.

Recommended Tools

- Tape Measure
- Sharp Knife
- Miter Saw
- Blue Painters Tape
- Clean Cloth
- Isopropyl Alcohol
- Caulking Tool
- Wood Wedges
- Mineral Spirits

Material Sizing

1. Joints must be sized every 5-7 feet (1.524-2.137 meters) to ensure gap opening is uniform and depth is sufficient for the supplied material.



NOTE: Allow sufficient depth for the material to be recessed 1/8"–1/4" in the joint.

Material Preparation

1. Store material at a minimum of 68°F (20°C) for a minimum of 24 hours prior to installation, regardless of temperature at location of installation.
TIP: Material will expand faster when hot and slower when cold. In cold temperatures, store material in a heated area 24 hours prior to installation. In hot temperatures, store material out of direct sunlight and not in an enclosed storage container where temperatures may exceed 100°F.
2. Store materials in a dry, enclosed area. Make sure materials are off the ground and out of direct sunlight. **Substrate** is to be 50 degrees or higher for installation.
3. (Stick Material) – Do not make any cuts until ready to install the material. Use a miter saw to make any cuts to the seal before removing the clear shrink packing. All starting and ending pieces must be square to the termination point.
WARNING: Install the material directly after removing the shrink packaging to ensure the material does not expand past the joint opening.
4. Use a sharp knife to make any cuts after the clear shrink packaging and wooden boards have been removed.




TIP: Apply mineral spirits to the knife for a smoother cut.

Joint Preparation


1. Verify that the joint is clean, sound, and will provide an appropriate surface for installation of the joint sealant.
 - a. Use compressed air to clean any loose debris from the joint.
 - b. Apply water or alcohol to a clean cloth and wipe the joint walls to the depth of the sealant materials plus 1”.
 2. Verify that the joint is uniform and repair any spalls prior to installation.
 3. Apply blue painters tape to both edges of the substrate face to prevent the silicone from contacting the deck surface.
 4. Check the material for appropriate length, width, and depth.
 - a. Supplied material should be approx. 25% larger but never less than 12% larger than the intended joint opening.
 - b. Joint depth must allow for the installed material to be recessed 1/8” - 1/4” from the joint face.
-

Sealant Installation (STICKS)

1. When fully prepared to install, cut the shrink packaging along the edge of the Masonite strapping.

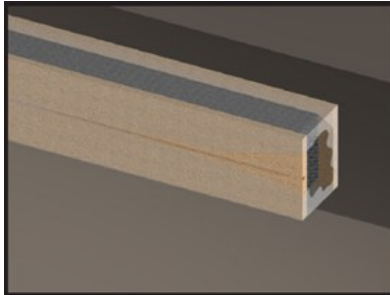


2. Verify that the material is cut square at both ends for proper seams. All pieces must be square to the termination point.
3. Remove the white release liner on both sides of the BS25-series foam seal.

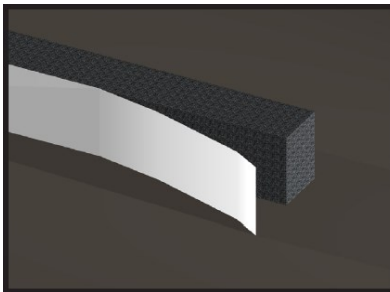

Sealant Installation (STICKS)

4. For joints that run horizontal, begin installing the material at one side of the joint (either side) and continue to install the material working towards the opposite end. For vertical joints, begin installation at the bottom of the joint and work upward.
 - a. The installed sticks will support the subsequent sticks until the material fully expands.

TIP: To ensure an aesthetic finish, verify that the silicone adhesive matches the color on the face of the joint sealant.

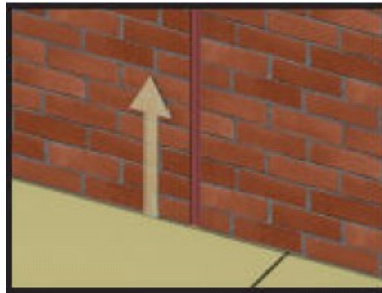

5. Run a 1/4" bead of the supplied silicone adhesive along both joint walls approx. 1/2" – 3/4" back from the surface of the joint substrate.


NOTE: When a continuous joint cannot be finished, the silicone on the substrate should stop at the last stick installed and silicone should not be applied to the end of the installed material until the next piece of material is ready to be installed.

WARNING: Do not twist or pull the material to avoid tearing the white release liner.

6. Place the material into the joint while gently pushing the pressure sensitive adhesive (PSA) up against the side of the joint. Once the material is in place, use a margin trowel to firmly press the adhesive to the substrate and allow the material to expand to fill the joint.

TIP: If the PSA is hampering installation, use a spray bottle to wet the adhesive surface of the seal (will not affect the final sealing properties).


WARNING: Allow 72 hours for full expansion and material equalization. Expansion and equalization rates are affected by temperature.

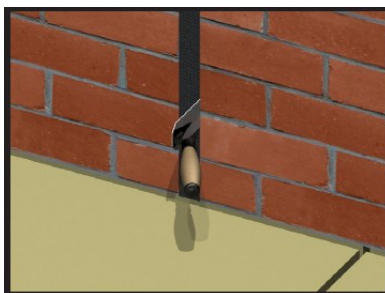

7. Silicone coating should be flush with, not protruding above, the substrate surface.

Sealant Installation (ROLLS)


1. When fully prepared to install, remove the outer lining surrounding the joint material. Be prepared to install the material immediately once the liner is removed to prevent the material from expanding past the joint width.

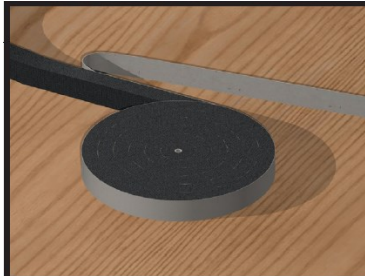


TIP: Material will expand faster when hot and slower when cold. In cold temperatures, store the material in a heated area 24 hours prior to installation. In hot temperatures, store material out of direct sunlight and not in an enclosed storage container where temperatures may exceed 100° F.

2. Cut off the first and last 1” – 2” of material using a sharp knife. Verify that the material is cut square at both ends for proper seams. All pieces must be square to the termination point.

TIP: Mineral spirits can be applied to the blade for a smoother cut.

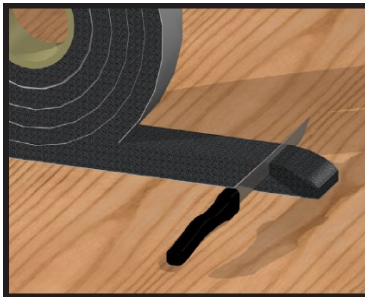


3. If the joint runs horizontal, begin installing the material at one side of the joint (either side) and continue to install the material working towards the opposite end. For vertical joints begin installation at the bottom of the joint and work upward.

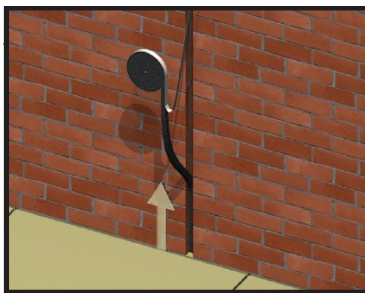


Sealant Installation (ROLLS)

4. Remove the white release liner as the material is installed.



5. Place the material into the joint while gently pushing the pressure sensitive adhesive (PSA) up against the side of the substrate. Once the material is in place, use a margin trowel to firmly press the adhesive to the substrate and allow the material to expand to fill the joint.

NOTE: If the PSA is hampering installation, apply a small amount of isopropyl alcohol or a mist of water to the adhesive side of the material. This will not impact the final sealing properties. Also, If the PSA is not sticking to the substrate, use wooden wedges to hold the material in place while the material expands. Once the material has expanded, the wedges can be removed.



WARNING: Allow 72 hours for full expansion and material equalization. Expansion and equalization rates are affected by temperature. Material will expand faster when hot and slower when cold.

Seams


Butt Seams:

1. Verify that the new piece of material is cut square and not at an angle to the previous installed piece.
2. Overlap extra material (approx. 1/2" -1") at seams and splices to ensure that the seam is in compression after installation.




Seams

3. 'T' and '+' intersections
 - a. Install horizontal material first.
 - b. Butt the vertical material up to the horizontal material following steps 1 & 2.

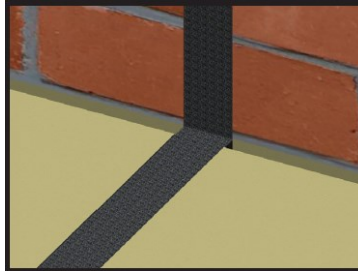

Miter Seams:

1. For joint corners, seam the material using a 45° angle cut.

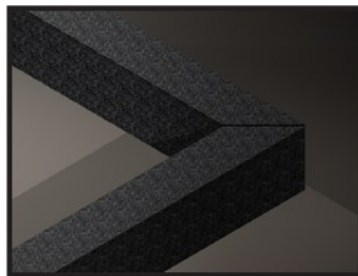

Finish

1. Allow 72 hours for full expansion and material equalization.
2. **Use the matching silicone to run a bead along each edge of the joint to fill any irregularities in the substrate.**