

ELCD Series - Drywall Bead Application

Interior Joints (Wall)

FEATURES

COMPLEMENTARY SEAL COLORS Available in four elastomeric colors: beige, white, gray or black.

MAXIMUM MOVEMENT "V" seal design allows for maximum thermal and seismic movement

DRYWALL BEAD FLANGE Designed for drywall applications with punched holes for easy mounting. Drywall mud is floated overtop of flange and easily painted leaving only the seal exposed.

DETAILS

MATERIAL

6063-T6 Aluminum, Meets ASTM B209

FINISH Mill

MOVEMENT

- Thermal: Horizontal
- Seismic: Lateral Shaer

MOUNTING Flush with Drywall Bead


JOINT SIZE 2 to 6 inches

SEAL LENGTH Continuous


APPLICATION Interior

INSTALLATION Wall or Ceiling

OPTIONS Additional size and material options available upon request.

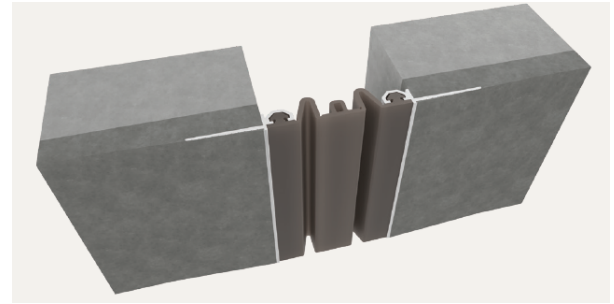


SEAL COLORS

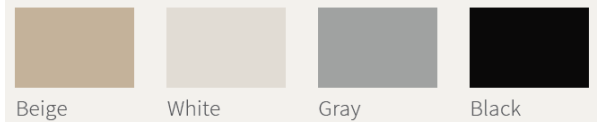


*For actual seal colors, please contact EMS for a seal sample

Sizes 5"-6":


WALL/CEILING-TO-WALL/CEILING

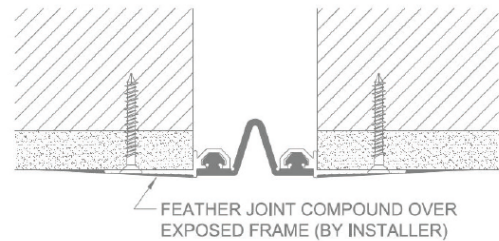

WALL/CEILING-TO-CORNER

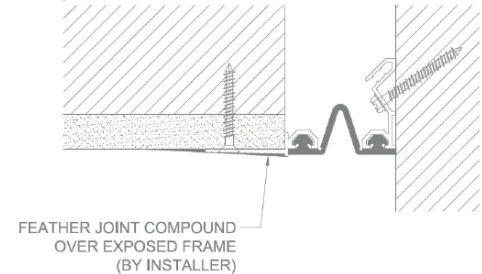

Sizes 2"-4":

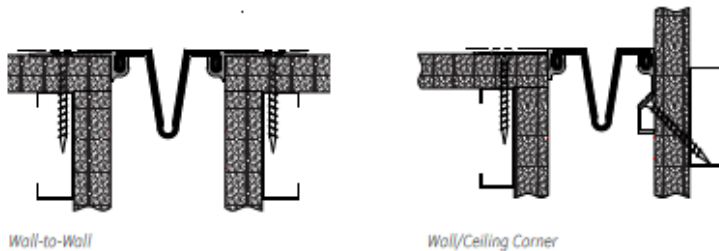

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
ELCD-200	Wall/Ceiling to Wall/Ceiling	2" (51mm)	2" (51mm)	2" (51mm)
ELCD-300	Wall/Ceiling to Wall/Ceiling	3" (76mm)	3" (76mm)	3" (76mm)
ELCD-400	Wall/Ceiling to Wall/Ceiling	4" (102mm)	4" (102mm)	4" (102mm)
ELCD-500	Wall/Ceiling to Wall/Ceiling	5" (127mm)	5" (127mm)	5" (127mm)
ELCD-600	Wall/Ceiling to Wall/Ceiling	6" (152mm)	6" (152mm)	6" (152mm)
ELCD-200W	Wall/Ceiling to Corner	2" (51mm)	2" (51mm)	2" (51mm)
ELCD-300W	Wall/Ceiling to Corner	3" (76mm)	3" (76mm)	3" (76mm)
ELCD-400W	Wall/Ceiling to Corner	4" (102mm)	4" (102mm)	4" (102mm)
ELCD-500W	Wall/Ceiling to Corner	5" (127mm)	5" (127mm)	5" (127mm)
ELCD-600W	Wall/Ceiling to Corner	6" (152mm)	6" (152mm)	6" (152mm)



Erie Metal Specialties, Inc.
13311 Main Road
Akron, NY 14001

Phone: 716-542-3991
Website: www.eriemetal.com
E-Mail: sales@eriemetal.com