

ELCF Series - Blockout Application

FEATURES

COMPLEMENTARY SEAL COLORS Available in four elastomeric colors: beige, white, gray or black.

COORDINATING CORNERS Available with corner option for a complete floor solution.

DETAILS

MATERIAL

6063-T5 Aluminum, Meets ASTM B221 and Santoprene

FINISH

Mill

MOVEMENT

- Thermal: Horizontal

MOUNTING

Blockout

JOINT SIZE 1 inch to 3 inches



LENGTH 10 Linear Feet

LOAD Pedestrian and Light Cart

INSTALLATION


Floor

OPTIONS Moisture barrier, fire barrier and additional materials, sizes and finishes upon request

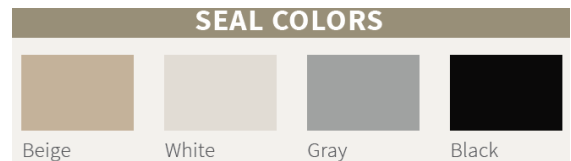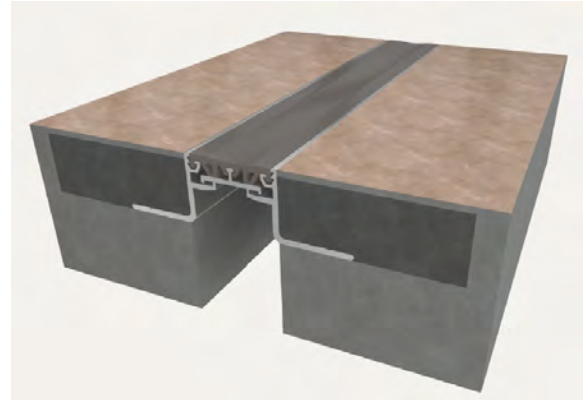


*For actual seal colors, please contact EMS for a seal sample

Sizes 1"-2":

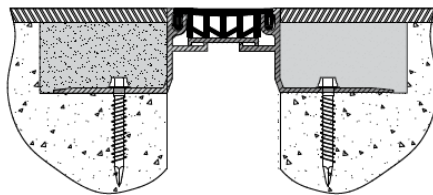


Floor-to-Floor

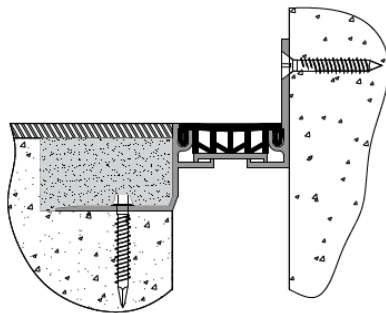


Floor-to-Wall/Corner

Size 3":

FLOOR-TO-FLOOR

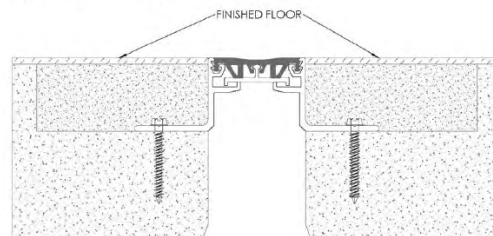

FLOOR-TO-WALL/CORNER

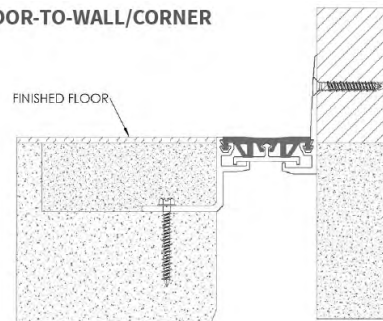

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
ELCF-100	Floor to Floor	1" (25mm)	1" (25mm)	.5" (13mm)
ELCF-200	Floor to Floor	2" (51mm)	2" (51mm)	1" (25mm)
ELCF-300	Floor to Floor	3" (76mm)	3" (76mm)	1.02" (26mm)
ELCF-100W	Floor to Wall	1" (25mm)	1" (25mm)	.5" (13mm)
ELCF-200W	Floor to Wall	2" (51mm)	2" (51mm)	1" (25mm)
ELCF-300W	Floor to Wall	3" (76mm)	3" (76mm)	1.02" (26mm)



Erie Metal Specialties, Inc.
13311 Main Road
Akron, NY 14001

Phone: 716-542-3991
Website: www.eriemetal.com
E-Mail: sales@eriemetal.com