

ELCFT Series - Tile Application

FEATURES

COMPLEMENTARY SEAL COLORS Available in four elastomeric colors: beige, white, gray or black.

COORDINATING CORNERS Available with corner option for a complete floor solution.

DETAILS

MATERIAL

6063-T5 Aluminum, Meets ASTB B221 & Santoprene

FINISH Mill

MOVEMENT

- Thermal: Horizontal

MOUNTING Surface


JOINT SIZE 1 inch to 3 inches

LENGTH 10 Linear Feet


LOAD Pedestrian and Light Cart

INSTALLATION Floor

OPTIONS Moisture barrier, fire barrier and additional materials, sizes and finishes upon request

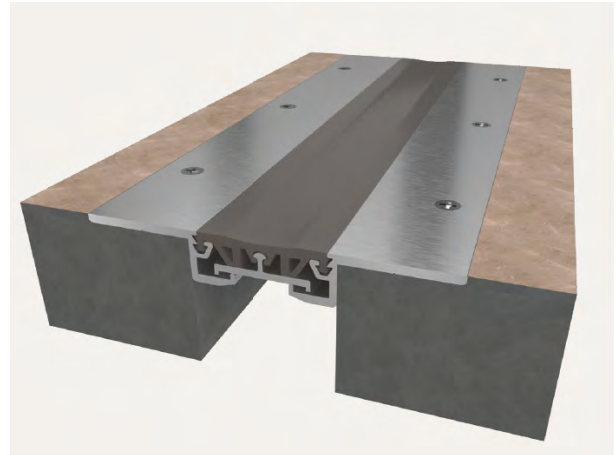


SEAL COLORS




*For actual seal colors, please contact EMS for a seal sample

Sizes 1"-2":

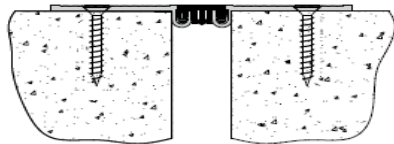


Floor-to-Floor

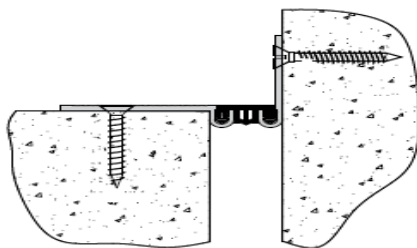


Floor-to-Wall/Corner

Size 3":

FLOOR-TO-FLOOR

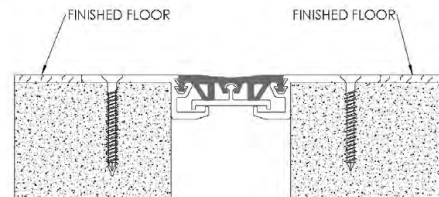

FLOOR-TO-WALL/CORNER

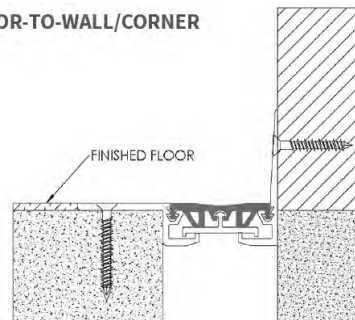

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
ELCFT-100	Floor to Floor	1" (25mm)	4" (102mm)	.5" (13mm)
ELCFT-200	Floor to Floor	2" (51mm)	5" (127mm)	1" (25mm)
ELCFT-300	Floor to Floor	3" (76mm)	6" (152mm)	1.02" (26mm)
ELCFT-100W	Floor to Wall	1" (25mm)	2.5" (64mm)	.5" (13mm)
ELCFT-200W	Floor to Wall	2" (51mm)	3.5" (89mm)	1" (25mm)
ELCFT-300W	Floor to Wall	3" (76mm)	4.5" (114mm)	1.02" (26mm)



Erie Metal Specialties, Inc.
13311 Main Road
Akron, NY 14001

Phone: 716-542-3991
Website: www.eriemetal.com
E-Mail: sales@eriemetal.com